



C.A 6418

Earth clamp with oblong head




TEST EARTH LOOPS ON RECTANGULAR BARS

- Loop resistance measurement from 0.01 to 1,200 Ω
- Current measurement from 0.5 mA to 20 A
- Alarms available in Ω and A
- Time/date-stamped storage of 300 measurements
- Automatic hold of the display when the clamp is opened
- Automatic calibration of the jaw gap
- Recalibration possible without returning to factory



C.A 6418 clamp for clamping any type of earth bar

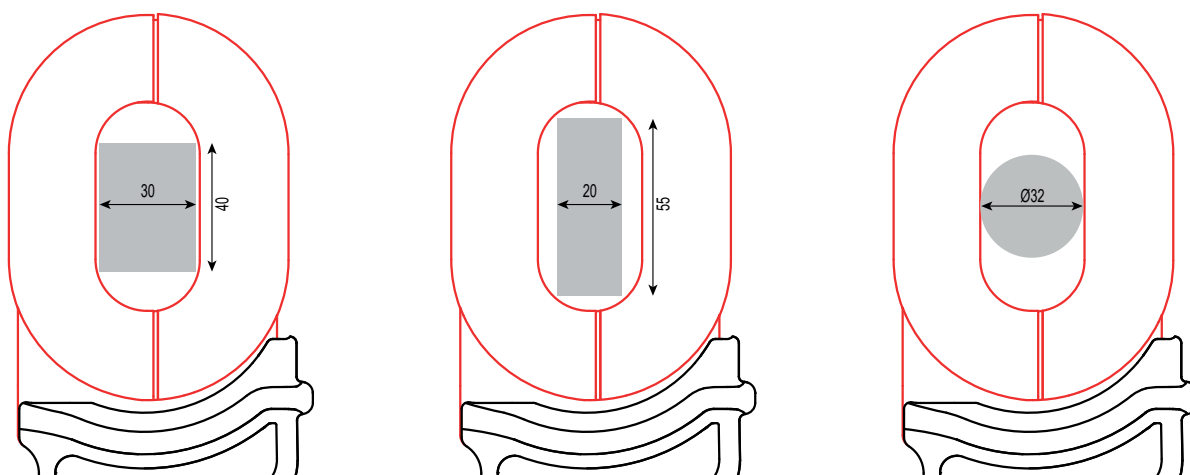

C.A 6418 technical specifications

LOOP OHMMETER

Measurement ranges	0.010 to 0.099 Ω	0.10 to 0.99 Ω	1 to 49.9 Ω	50 to 149 Ω	150 to 245 Ω	250 to 440 Ω	450 to 640 Ω	650 to 1,200 Ω
Resolution	1 m Ω	10 m Ω	100 m Ω	1 Ω	5 Ω	10 Ω	10 Ω	50 Ω
Accuracy	$\pm (1.5 \% R + 0.01 \Omega)$	$\pm (1.5 \% R + 2 r)$	$\pm (1.5 \% R + 2 r)$	$\pm (2.5 \% R + 2 r)$	$\pm (5 \% R + 2 r)$	$\pm (10 \% R + 2 r)$	$\pm (15 \% R + 2 r)$	$\pm (20 \% R + 2 r)$
No-load voltage	≤ 4.5 mV to 2,083 Hz							

AMMETER

Measurement ranges	0.5 to 9.995 mA	10.00 to 99.90 mA	100.0 to 299.0 mA	0.300 to 2.990 A	3.00 to 20.00 A
Resolution	50 μ A	100 μ A	1 mA	10 mA	100 mA
Accuracy	$\pm (2 \% R + 200 \mu A)$	$\pm (2 \% R + r)$	$\pm (2 \% R + r)$	$\pm (2 \% R + r)$	$\pm (2 \% R + r)$

SETUP

Alarms	Configurable for Z and I
Buzzer	Active
HOLD	Manual or automatic PRE-Hold
Automatic power-off	Active / Inactive

C.A 6418 general specifications

LOOP OHMMETER

Display	OLED 152 segments – Active area 48 x 39 mm
Storage	300 time/date-stamped measurements
Power supply	4 x 1.5 V LR6 AA alkaline batteries or 4 NiMH batteries
Battery life	2,400 x 30 s measurements
Calibration	Automatic at start-up
IEC 61010	100 V CAT IV , 150 V CAT III
Ingress protection	IP 40
Dimensions	300 x 106 x 56 mm
Weight	1.2 kg approx. including batteries

* R = Reading, r = resolution

State at delivery

A C.A 6418 delivered with:

- 1 carrying case
- 4 x 1.5 V batteries
- 1 wrist strap
- 1 CD-Rom containing the user's manuals
- 1 quick startup guide
- 1 multi-language safety datasheet
- 1 verification certificate



References for ordering

C.A 6418	P01122018
CLI calibration loop	P01122301



FRANCE
Chauvin Arnoux
 190, rue Championnet
 75876 PARIS Cedex 18
 Tel: +33 1 44 85 44 38
 Fax: +33 1 46 27 95 59
 export@chauvin-arnoux.fr
 www.chauvin-arnoux.com

UNITED KINGDOM
Chauvin Arnoux LTD
 Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk
 Dewsbury, West Yorkshire - WF12 7TH
 Tel: +44 1924 460 494
 Fax: +44 1924 455 328
 info@chauvin-arnoux.co.uk
 www.chauvin-arnoux.com

MIDDLE EAST
CHAUVIN ARNOUX MIDDLE EAST
 P.O. BOX 60-154
 1241 2020 JAL EL DIB - LEBANON
 Tel: +961 1 890 425
 Fax: +961 1 890 424
 camie@chauvin-arnoux.com
 www.chauvin-arnoux.com

CHAUVIN
ARNOUX
 GROUP