

RADIODETECTION®

Lexxi™ T1660 Time Domain Reflectometer

High-resolution hand-held cable tester for first responders



SPX®

Radiodetection's Lexxi T1660 Time Domain Reflectometer for Metallic Cables

Innovative, economic cable fault locator

Radiodetection's Lexxi T1660 provides an unrivalled combination of performance, usability and economy.

Radiodetection has created Lexxi T1660 by taking the easy-to-hold ergonomics familiar to users of the Riser Bond Model 1550 and Bicotest Lexxi T810 and installing a unique TDR engine and a 3.5" color back-lit display.

The result is a cable tester whose 1% distance accuracy and resolution gives technicians the tool they need to find faults quickly and accurately. Added to this is the Lexxi T1660's great value that allows more technicians to be equipped.

The Lexxi T1660 is suitable for analysing all metallic cables consisting of at least two metallic elements, one of which can be the armouring or the screen. Cable types include CATV, twisted pair telecom, Ethernet and even LV power cables.

The Lexxi T1660 is shipped with a set of 100Ω crocodile clip Twisted Pair connection cables as standard. A range of optional plug-in modules make it adaptable to the requirements of a wide variety of industries and applications, with the Blocking Filter module allowing safe analysis of live 3-phase mains cables.

Radiodetection's Lexxi T1660 offers innovation and economy, enabling a step-change in productivity.

Features

- Large, color display
- 1% fault location accuracy
- 0.5m dead zone
- 6km, 19000' maximum range
- 7m, 23' minimum display range
- 11 range settings
- Operates from Alkaline or NiMH rechargeable batteries
- 12 hours typical battery life time (alkaline)
- User selectable Power Down time
- Selectable cable impedance
- VoP adjustable from 1% to 99%
- 100Ω Twisted Pair Alligator Clip cables included as standard
- Optional modules, including Category IV mains Blocking Filter, for twisted pair, coaxial and power cable use make the Lexxi T1660 suitable for multiple industries and applications



Large, easy to read color display simplifies fault locating in most conditions.



Modules for twisted pair, coaxial and power cables allow the Lexxi T1660 to find faults in wide ranging applications, even on live, 3-phase mains cables.



Lexxi T1660 is simple to use, with just 6 control buttons and an easy to follow menu to set your preferences.

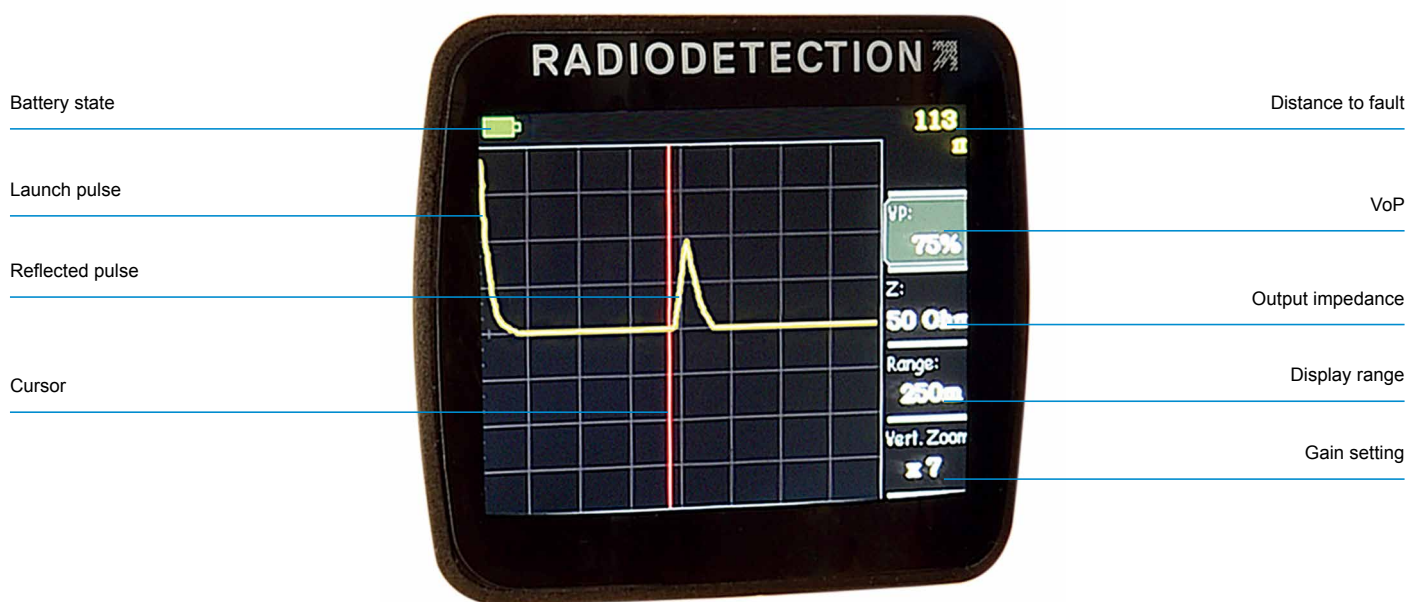


Table of Specifications		Notes
Ranges	7, 15, 30, 60, 120, 250, 500, 1000, 2000, 3000, 6000 20, 50, 100, 200, 400, 800, 1600, 3200, 9400, 10000, 20000	Meters Feet
Range Selection	Manual range control	
Accuracy	1% of selected range*	
Display	328x256 pixel 3.5" color backlit LCD	
Resolution	Approx 1% of range	
Velocity Factor, VoP	Adjustable from 1% to 99%	
Output Pulse	5V peak to peak	Into open circuit
Output Impedance	Selectable 25, 50, 75 & 100 ohms	
Output Pulse Width	3ns to 3ms	Automatic with range
Scan Rate	2 scans/second	
Batteries	Six AA (LR6/R6) Alkaline or NiMH cells	
Battery Life	12 hours typical, continuous operation	Alkaline batteries
Voltage Protection	600V AC Category III, 300V AC Category IV 250V AC	Lexxi T1660 with Mains Blocking Filter Lexxi T1660 with all other connectors and Plug-In Module options (see below)
Power Down	Selectable 1, 3, 5, 10, 15 minutes or disabled	
Operating Temp	-10° to 50°C, 14° to 122°F	
Storage Temp	-20° to 70°C, -4° to 158°F	
Dimensions	250x100x55mm, 9.8x4x2.2"	
Weight	600g, 1.3lb	
Standards	EMC BS/EN 61326-1	
Water/Dust Proof	IP54	

Ordering information		
Description	Sales Part Number	Notes
Lexxi T1660 TDR	10/T1660	Lexxi T1660 TDR
Standard Accessories		
Twisted Pair, Alligator Clips	10/T1660-TP-ALLIG	Connection cables, 1.9m, 75"
Lexxi T1660 bag, clear cover	10/T1660-BAG	Bag
Optional Accessories		
Mains Blocking Filter, 25Ω, Cat IV	10/T1660-BLOCK-MOD	Plug-in Module, option
50Ω Twisted Pair Plug-In, Croc Clip	10/T1660-TP-CROC-MOD-50	Plug-in Module, option
100Ω Twisted Pair Plug-In, Croc Clip	10/T1660-TP-CROC-MOD-100	Plug-in Module, option
75Ω BNC Plug-In, BNC-F adapter	10/T1660-BNC-MOD-75	Plug-in Module, option

*Measurement accuracy of $\pm 1\%$ assumes accurate setting of Velocity of Propagation (VoP), homogeneity of VoP along the length of the cable and accurate cursor positioning.

Global locations

Radiodetection (USA)

28 Tower Road, Raymond, Maine 04071, USA

Tel: +1 (207) 655 8525 Toll Free: +1 (877) 247 3797 rd.sales.us@spx.com www.radiodetection.com

Pearpoint (USA)

39-740 Garand Lane, Unit B, Palm Desert, CA 92211, USA

Tel: +1 800 688 8094 Tel: +1 760 343 7350 pearpoint.sales.us@spx.com www.pearpoint.com

Radiodetection (Canada)

344 Edgeley Boulevard, Unit 34, Concord, Ontario L4K 4B7, Canada

Tel: +1 (905) 660 9995 Toll Free: +1 (800) 665 7953 rd.sales.ca@spx.com www.radiodetection.com

Radiodetection Ltd. (UK)

Western Drive, Bristol, BS14 0AF, UK

Tel: +44 (0) 117 976 7776 rd.sales.uk@spx.com www.radiodetection.com

Radiodetection (France)

13 Grande Rue, 76220, Neuf Marché, France

Tel: +33 (0) 2 32 89 93 60 rd.sales.fr@spx.com <http://fr.radiodetection.com>

Radiodetection (Benelux)

Industriestraat 11, 7041 GD 's-Heerenberg, Netherlands

Tel: +31 (0) 314 66 47 00 rd.sales.nl@spx.com <http://nl.radiodetection.com>

Radiodetection (Germany)

Groendahlscher Weg 118, 46446 Emmerich am Rhein, Germany

Tel: +49 (0) 28 51 92 37 20 rd.sales.de@spx.com <http://de.radiodetection.com>

Radiodetection (Asia-Pacific)

Room 708, CC Wu Building, 302-308 Hennessy Road, Wan Chai, Hong Kong SAR, China

Tel: +852 2110 8160 rd.sales.asiapacific@spx.com www.radiodetection.com

Radiodetection (China)

Ming Hao Building D304, No. 13 Fuqian Avenue, Tianzhu Town, Shunyi District, Beijing 101312, China

Tel: +86 (0) 10 8416-3372 rd.service.cn@spx.com <http://cn.radiodetection.com>

Radiodetection (Australia)

Unit H1, 101 Rookwood Road, Yagoona NSW 2199, Australia

Tel: +61 (0) 2 9707 3222 rd.sales.au@spx.com www.radiodetection.com

Radiodetection is a leading global developer and supplier of test equipment used by utility companies to help install, protect and maintain their infrastructure networks.